


THE NEW C500

Our most popular Undercounter model. Perfect option for every busy kitchen or bar. Commissioned as a glass or dishwasher on site.




New Dimensions

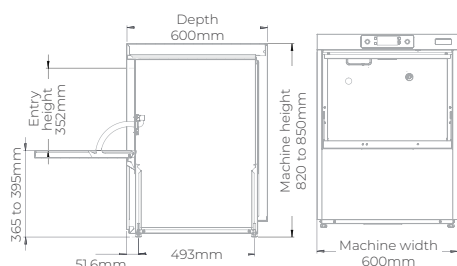

Note: external dimensions of the C500 model differs from older models.

Model	Code	Amps
C500	853V0001	15A - 1ph



Glasswasher

- Pint size glasses per rack: 25
- Theoretical max racks per hr: 40
- Glasses per hour: 1,000
- Light – 1.5 minutes
- Standard – 2 minutes.

Dishwasher

- 10-inch plates per rack: 18
- Theoretical max racks per hr: 30
- Plates per hour: 540
- Light – 2 minutes
- Standard – 3 minutes
- Intensive – 5 minutes

The C500 can be specified with an integral water softener, an essential addition when installed in medium or hard water areas.

Each C500 machine includes two 500 x 500 baskets: one for plates with a small cutlery holder and one for glasses with three inserts.



New bluetooth app for operators and service technicians.
Access user guides, machine settings, monitor performance data and service information.



Simple choice.

One model level with all the features you need. Just choose the size, power and optional integrated water softener.



Simple set up.

Commissioned on install as a glass or dishwasher in minutes.



Simple use.

Press on. Press wash. Watch the display for notifications and troubleshooting.



Simple cleaning.

Simple click in, click out wash arms, double filtration system, and moulded basket rails all aid simple cleaning.



Simple app.

New bluetooth app for operators and service technicians. Access user guides, machine settings, monitor performance data and service information.



Simple servicing.


The repositioning of key parts make servicing and maintenance quicker. Reducing maintenance costs throughout the life of the machine.

Standard features across the undercounter range:

-  Colour coded display
-  Reduced rinse water consumption
-  Energy saving standby mode
-  Drain pump, rinse booster pump, detergent and rinse aid pumps
-  Double skinned door and cabinet to reduce noise and limit heat loss
-  Hygiene and service reminders

-  Deep clean mode and refresh cycle
-  Optional audible alarm
-  2 year warranty on parts and labour on all Classeq models
-  Bluetooth connectivity
-  Three power options: 15A, 30A Single Phase and 15A Three Phase

Accessories

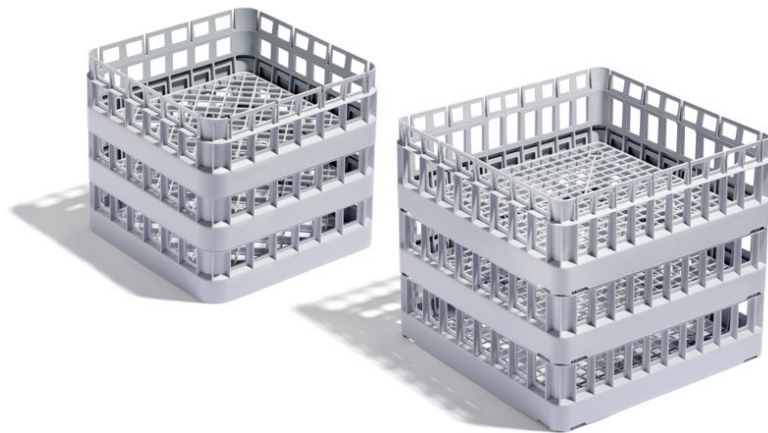


Baskets & Racks

Name	Size	Suitable for	Code
Open Rack	400 x 400mm	C400, C400WS, G400, G400DUO	30001165
Open Rack (Tall)	500 x 500mm	C500, C500WS, G500, G500DUO	30013206
400mm Glass Basket Insert	-	C400, C400WS	30018552
500mm Glass Basket Insert	-	C500, C500WS	30018551
Dish Insert	-	C400, C400WS	30007213
Open Rack	500 x 500mm	C500, C500WS, G500, G500, P500A	30001197
Plate Rack	400 x 400mm	C400, C400WS, D400, D400DUO	30001166
Plate Rack	500 x 500mm	C500, C500WS, D500, D500DUO, All P500 models	30001198
Single cutlery holder	-	All models	30001167
8 Compartment cutlery rack	-	C400, C400WS, D400, D400DUO, D500, D500DUO	3602258




New Undercounter Range

C400



C500



Note: external dimensions of the new models differs from older models.



C400 Model



C500 Model

Dimensions

Width	460mm	600mm
Height	720-750mm	820-850mm
Depth	570mm	600mm
Door Height (when open)	310mm	364mm
Door Depth (when open)	910mm	990mm
Clear Entry Height	312mm	352mm

Hydraulics specification

Water supply connection	G3/4" (3/4"BSP)	G3/4" (3/4"BSP)
Required water pressure min/max	1-10 bar	1-10 bar
Incoming Water temperature min/max	4°C/55°C	4°C/55°C
Drain size	40mm diam.	40mm diam.
Maximum drain height (from machine base)	500mm	600mm
Optional integrated water softener	Yes	Yes

Electrical specification

15 Amp Plug – 1 Phase

Amps required	15A (1 Phase)	15A (1 Phase)
Standard operating voltage	220-240V/1N~/50Hz	220-240V/1N~/50Hz
Total connected load	2.5 kW	2.5 kW

30 Amp – 1 Phase

Amps required	30A (1 Phase)	30A (1 Phase)
Standard Operating Voltage	220-240V/1N~/50Hz	220-240V/1N~/50Hz
Total Connected Load	6.5 kW	6.5 kW

15 Amp – 3 Phase

Amps required	15A (3 Phase)	15A (3 Phase)
Standard Operating Voltage	380-415V/3N~/50Hz	380-415V/3N~/50Hz
Total Connected Load	6.5 kW	6.5 kW

Capacities & Performance

Glasses per rack	16	25
Plates per rack	9	18
Wash Programmes - Glass	1.5 & 2 min. cycles	1.5 & 2 min. cycles
Wash Programmes - Dish	2, 3 & 5 min. cycles	2, 3 & 5 min. cycles
Theoretical max. racks per hour - Glass	40	40
Theoretical max. racks per hour - Dish	30	30
Wash tank capacity	9.5 litres	15 litres
Rinse tank capacity	6.5 litres	6.5 litres
Wash temperature	60 °C	60 °C
Rinse temperature - Glass	70 °C	70 °C
Rinse temperature - Dish	82 °C	82 °C
Water consumption per cycle	2.75 litres	2.75 litres

Other

Weight (Empty)	49.5Kg / 54.5 Kg (WS)	55.8Kg / 60.8 Kg (WS)
Weight (Full)	66Kg / 72.5 Kg (WS)	77.3Kg / 83.8 Kg (WS)
Weight (Packed)	58.3Kg / 63.3 Kg (WS)	63.8Kg / 68.8 Kg (WS)
Optional Inbuilt Water Softener	Yes	Yes